




GWE PolyMix®

The fast and easy solution
to produce a ready to use
drilling fluid

Bentonit + Polymer =
GWE PolyMix®

Advantages at a glance

- ✓ Universally applicable
- ✓ High yield
- ✓ Excellent borehole stabilizing capability
- ✓ Quick and easy to prepare
- ✓ Combinable with all common drilling fluid additives
- ✓ Optimized to produce the initial drilling mud
- ✓ Cost reduction due to minimized drilling fluid losses

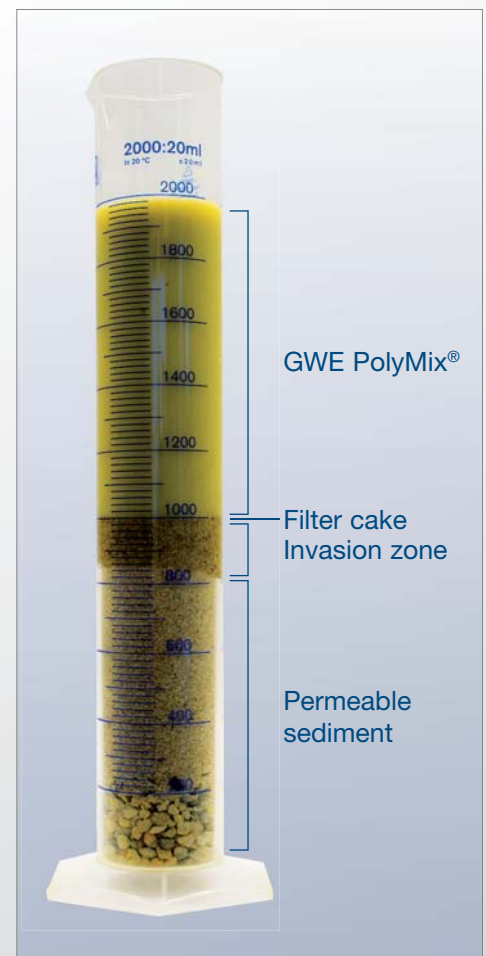

GWE drilling fluids for vertical drilling applications


GWE PolyMix® combines the advantages of two drilling fluid additives in one ready-made mixture. This combination enables the fast and easy mixing of an universally applicable drilling fluid.

GWE is the competent partner in the field of drilling fluid techniques and provides a complete drilling additive product portfolio for rotary flush drilling.

Product properties

Product	Viscosity - Stabilization	Clay inhibition - Protective colloid	Filtrate reduction
GWE PolyMix®	+++	++	++
Viscopol® R	+++	+++	++
Viscopol® T	++	++	++
Viscopol® TLV	o	+	++
Tixoton	+++	o	+

(Extract of the product portfolio)

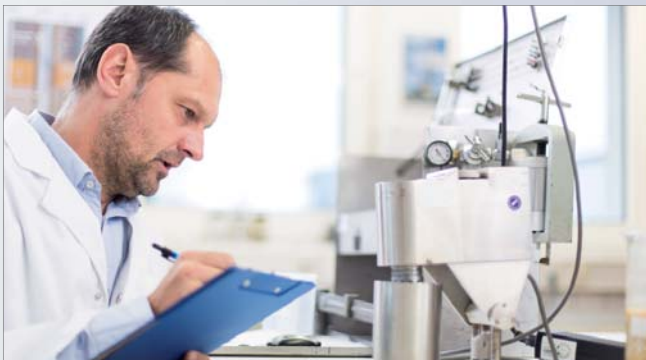

GWE Drilling Fluid Service

We would be happy to advise you personally about our services and solutions.

- Preparation of drilling **fluid concepts**
- On-Site drilling **fluid service**
- Analysis of drilling mud at our **mud laboratory**

GWE pumpenboese GmbH
Moorbeerenweg 1
31228 Peine, Germany

Tel.: + 49 (0) 5171 294-0
Fax: + 49 (0) 5171 294-111
drillingfluids@gwe-group.com



www.gwe-group.com