



Value PVC casing and screen pipes

Specially designed for specific requirements in well construction

- For installation depth of up to 150 m
- Almost unlimited service life


Summary of system advantages

- ✓ Outstanding cost-/benefit ratio due to efficient material composition
- ✓ Simple solvent socket connection
- ✓ Collapse resistance rate up to 10 bar
- ✓ High precision slot width from 0.2 - 3.0 mm for sand free water supply
- ✓ Extensive screen intake capacity
- ✓ High chemical resistance and absolutely corrosion free



Value PVC casing- and screen pipes

Screen intake capacity at intake velocity of 3 cm/s

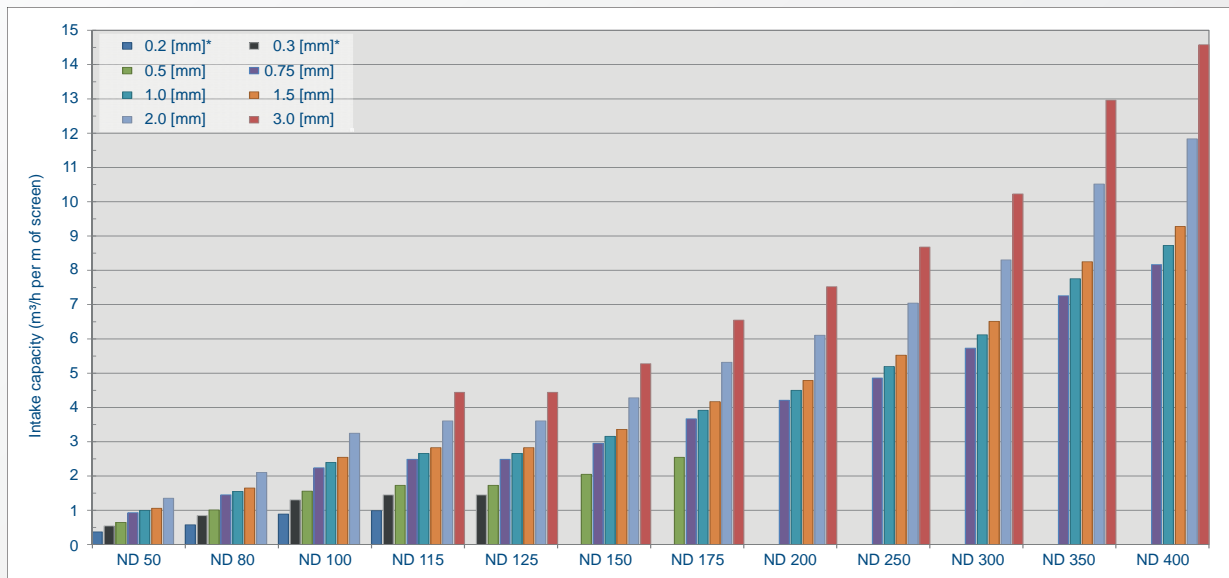

* upon request

Product range

		Casing pipe		
		Installation depth 50 m	Installation depth 100 m	Installation depth 150 m
ND	OD (mm)	Wall thickness (mm)	Wall thickness (mm)	Wall thickness (mm)
50	60			4.0
80	90	3.5		5.0
100	113	3.9	5.0	5.7
115	125	4.3	5.0	6.3
125	140	4.8	6.5	7.1
150	165	5.7	7.5	8.3
175	195	6.7	8.5	9.9
200	225	7.8	10.0	11.4
250	280	9.7	12.5	14.2
300	330	11.4	14.5	16.7
350	400	13.8	17.5	20.3
400	450	15.6	19.5	22.8

Additional designs and other types of pipe connections are available on request.



GWE pumpenboese GmbH
 Moorbeerenweg 1
 31228 Peine

Tel.: +49 (0) 5171 294-0
 Fax: +49 (0) 5171 294-111
 info@gwe-group.com

www.gwe-group.com