

NEW!
DN 80




SBF Norip-Pipe®

**The safe solution for
ground water monitoring
wells**

**Execution DN 80 is optimal for
use of 3" pumps!**

Summary of system advantages

- ✓ **Permanently sealed pipe connections due to specially designed double sockets**
- ✓ **Robustness due to high notch impact strength**
- ✓ **Safe installations even at low temperatures**
- ✓ **Installations at several 100 m depths are feasible with respective construction designs**
- ✓ **Easy to connect trapezoidal threads for fast and safe installation**
- ✓ **Corrosion free and high chemical resistance**
- ✓ **Screen- and casing pipe type DN 50, DN 65, DN 80, DN 115 and DN 125**

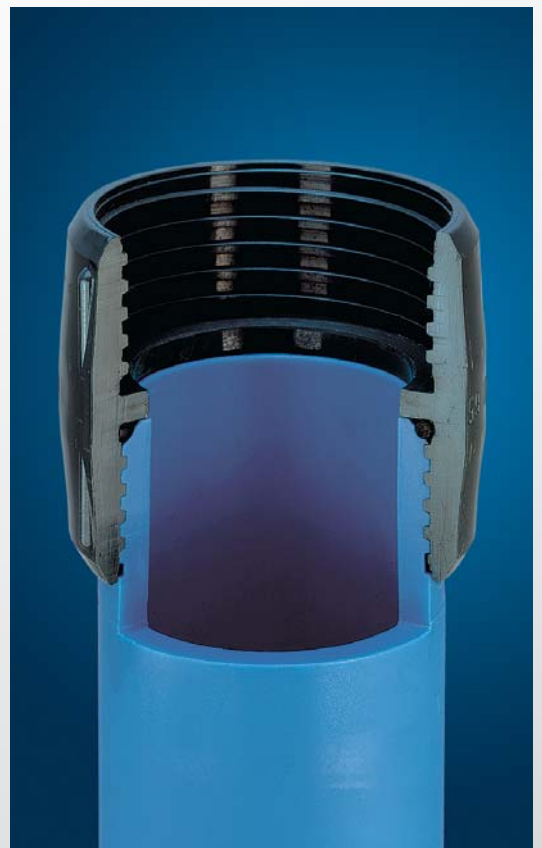



SBF Norip-Pipe®

SBF Norip®-double socket

Nominal diameter DN	Outside diameter mm	Length mm
50	75	80
65	92	76
80	106	99
115	143	106
125	162	142


Standard sealing in elastomeric material

Packing/shipping units:

DN 50, DN 65 = 10 pcs

DN 115, DN 125 = 5 pcs

Partial quantities not available

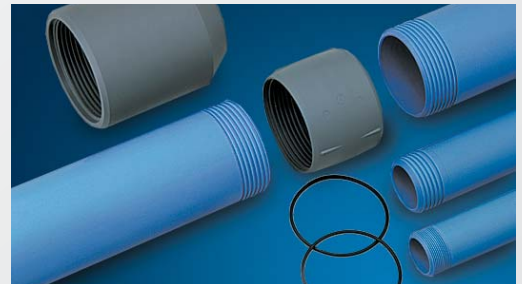

SBF Norip-Pipe®

Nominal diameter DN	Outside diameter mm	Wall thickness mm	Weight kg/m	External pressure resistance N/mm ²	Tensile strength casing/screen pipe kN
50	60	6.0	1.5	7.3	12.0/4.0
65	75	7.5	2.4	7.3	25.0/8.0
80	90	5.0	2.0	1,1	15,3/5,5
115	125	7.5	4.1	1.4	35.0/11.0
125	140	8.0	4.9	1.2	45.0/16.0

Lengths DN 50 - DN 125 1.0 - 2.0 - 3.0 - 4.0 - 6.0 m
Slot widths DN 50 - DN 115 0.3 - 0.5 - 0.75 - 1.0 - 1.5 - 2.0 - 3.0 mm
DN 125 0.5 - 0.75 - 1.0 - 1.5 - 2.0 - 3.0 mm

We offer our integral advice for your specific project requirements.

GWE pumpenboese GmbH
Moorbeerenweg 1
31228 Peine

Tel.: +49 (0) 5171 294-0
Fax: +49 (0) 5171 294-111
info@gwe-group.com



www.gwe-group.com