




## PVC Well Head

Increased ease of installation  
by optimizing technical details!

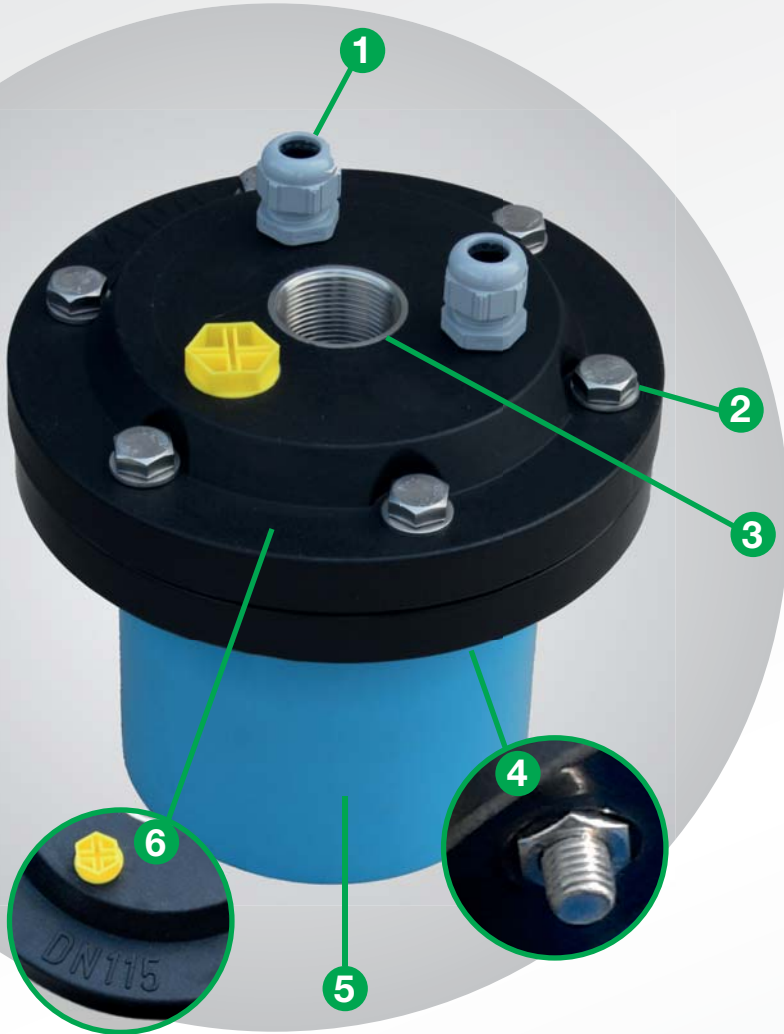

### Advantages and innovations

- 1 New cable glands with metric connection thread
- 2 Stainless steel bolts with optimized diameter
- 3 Threaded sleeve made of stainless steel also ensures after repeated installation of the riser pipes a safe, dimensionally accurate screw connection
- 4 Increased ease of installation due to integrated hexagonal socket mount at lower flange side
- 5 PVC pipe with bonded socket joint for secure closure of the well
- 6 Size is indicated on the well head cover



The use of the supplied  
o-ring guarantees tightness  
against surface water.

# PVC Well Head

## Intended purpose

The well head is plugged onto the well casing and bonded. Thus it offers a simple low cost and safe well completion. The easy to assemble cover of the well head allows a quick access at the well.

## Types

Nominal diameter	Thread	Outer diameter	Height	Bolts	Tensile strength
DN 80	1" – 1¼"	165 mm	ca. 190 mm	4 × M8	7,5 kN
DN 100	1¼" – 2"	185 mm	ca. 200 mm	4 × M8	
DN 115	1¼" – 2"	185 mm	ca. 210 mm	4 × M8	
DN 125	1¼" – 2"	225 mm	ca. 210 mm	6 × M12	10 kN
DN 150	1¼" – 4"	250 mm	ca. 220 mm	6 × M12	
DN 175	1¼" – 4"	280 mm	ca. 280 mm	6 × M12	
DN 200	1¼" – 4"	320 mm	ca. 300 mm	6 × M16	15 kN
DN 250	2" – 4"	375 mm	ca. 340 mm	6 × M16	
DN 300	2" – 4"	425 mm	ca. 400 mm	6 × M16	

We can also supply other dimensions on request.

